

SINGLE DOOR BOTTLE COOLER WITH CANOPY



SDS 385 DC 1 C F

Standard Features


- 2 pcs adjustable feet , 2 pcs roller
- Thermoformed inner liner**
- Internal upper fluorescent illumination
- 5 pcs. 5x7 Can Loading Capacity Shelves**
- Plastic door frame
- Built-in Handle**
- Fluorescent illuminated canopy
- Packing with cardboard box and wooden pallet**
- Mechanical Thermostat
- Tempered Double Glass**

Optinoal Features

- Custom design
- 4 adjustable stability feet
- Left or right fluorescent inner illumination
- Led illumination
- 6x7 pcs. Can Loading Capacity Shelves (for max. Loading)
- Price holders and strips
- Low-e, Argon, Energy safety glass
- Door lock / Remote lock
- Alluminum door frame
- Colored door frame,canopy, Bottom panel
- Door handle set
- Self Closing
- Plastic / Curved plastic bottom panel
- Power Lamp
- Light and fan switch
- Sticker app.
- Analogue thermometer
- Digital thermometer
- Horizontal / Vertical curved canopy
- High canopy
- Flat door
- R134a refrigerant

Gross / Net Volume (Lt)	379/368
Can 330 ml. loading (standard / max.)	406 / 476
Internal Dimensions (w x d x h) (mm)	505x425x1615
External Dimensions (w x d x h) (mm)	595x605x1994
External Dimensions with Package (w x d x h) (mm)	610x670x2070
Product Foot-print Area (m ²)	0,36
Left Side Sticker Area (w x h)(mm)	525x1955
Right Side Sticker Area(w x h) (mm)	525x1955
Canopy Sticker Area (w x h)	555 x 162
Glass Door Sticker Area (w x h) x2	490x1580
Net Weight (kg)	80
Gross Weight With Package (kg)	88
Temperature Range °C	+1 / +10
Refrigerant	R600a
Climate Class	CC2K4 (32C/65% Rh)
Power Source (V/Hz)	220-240V 50Hz
Loading Container 40'HC (units)	57
Loading Truck 13,6 m (units)	80

OPTIONAL Flat door

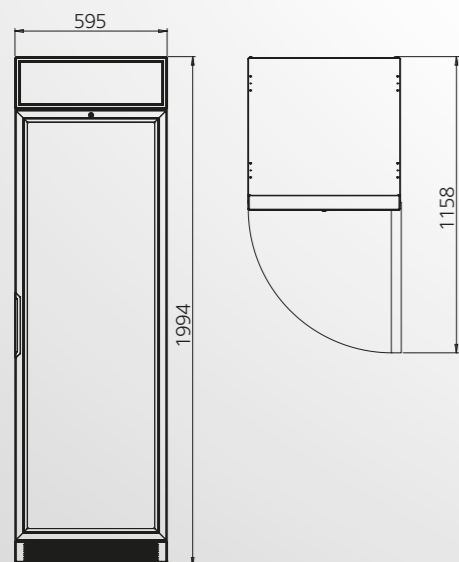

SINGLE DOOR BOTTLE COOLER WITH CONTROL PANEL



SDS 385 DC 1 P F

Standard Features

- 2 pcs adjustable feet , 2 pcs roller
- Thermoformed inner liner**
- Internal upper fluorescent illumination
- 5 pcs. 5x7 Can Loading Capacity Shelves**
- Plastic door frame
- Built-in Handle**
- Packing with cardboard box and wooden pallet
- Mechanical Thermostat**
- Tempered Double Glass

Optinoal Features

- Analogue thermometer
- Digital thermometer
- Custom design
- 2 adjustable stability feet
- Left or right fluorescent inner illumination
- Led illumination
- 6x7 pcs. Can Loading Capacity Shelves (for max. Loading)
- Price holders and strips
- Low-e, Argon, Energy safety glass
- Door lock
- Alluminum door frame
- Colored door frame,canopy, Bottom panel
- Door handle set
- Self Closing
- Plastic Bottom panel
- Power Lamp
- Light and fan switch
- Sticker app.
- Reversible door (without lock)
- Flat door
- R134a refrigerant

Gross / Net Volume (Lt)	379/368
Can 330 ml. loading (standard / max.)	406 / 476
Internal Dimensions (w x d x h) (mm)	505x425x1615
External Dimensions (w x d x h) (mm)	595x605x1832
External Dimensions with Package (w x d x h) (mm)	610x670x1985
Product Foot-print Area (m ²)	0,36
Left Side Sticker Area (w x h)(mm)	525x1800
Right Side Sticker Area(w x h) (mm)	525x1800
Glass Door Sticker Area (w x h) x2	490x1580
Net Weight (kg)	75
Gross Weight With Package (kg)	81
Temperature Range °C	+1 / +10
Refrigerant	R600a
Climate Class	CC2K4 (32C/65% Rh)
Power Source (V/Hz)	220-240V 50Hz
Loading Container 40'HC (units)	57
Loading Truck 13,6 m (units)	80

OPTIONAL Flat door

